




Usage: single

When the anchor is located above the user, the GRILLON lanyard is connected to the harness ventral attachment point, so that the load is comfortably distributed between the belt and leg loops. The user adjusts his position by operating the handle, while holding the free end of the lanyard.

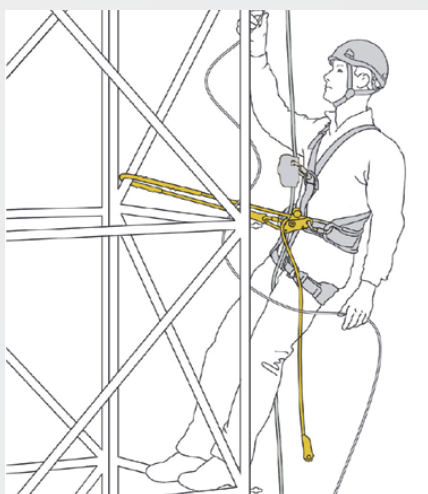

Usage: double

The GRILLON lanyard can be used in double mode (on the harness lateral attachment points) when the user must work with a supporting surface for the feet. This type of attachment gives better load distribution on the belt. The user precisely adjusts his position by pressing on the lanyard's pivoting cam. The GRILLON lanyard's rope protector allows good lateral mobility because the rope can slide through the protector.

GRILLON


Adjustable lanyard for work positioning

- Lanyard with fine adjustment system for precise work positioning
- Can be used in two ways:
 - double mode, on the lateral attachment points of the harness, to distribute the weight on the belt (user has weight on his feet): length is adjusted by pressing on the pivoting cam)
 - single mode, on the harness ventral attachment point, to distribute weight between the waistbelt and the leg loops (user is suspended): length is adjusted by operating the handle while holding the free end of the lanyard
- Removable protective sheath protects the rope from abrasive contact and favors smooth rope glide. The protection can be removed when the single lanyard technique is used, to bring the user closer to the anchor
- Available in several lengths:
 - GRILLON (L52A 002): 2 m, 435 g
 - GRILLON (L52A 003): 3 m, 515 g
 - GRILLON (L52A 004): 4 m, 595 g
 - GRILLON (L52A 005): 5 m, 675 g
- Certification(s): CE EN 358

NOTE: GRILLON lanyards can also be used to create adjustable anchors or horizontal lifelines; please see specific versions of GRILLON lanyards for these uses.



All GRILLON lanyards have a handle which allows the lanyard to be used in single mode when connected to the harness ventral attachment point. The handle allows the cam to be unlocked to adjust position while holding the free end of the rope.

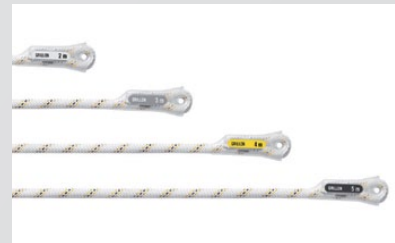

GRILLON lanyard length is identified by a color-coded label at the connector end.

GRILLON HOOK

Adjustable work positioning lanyard with HOOK connector

- Lanyard with fine adjustment system for precise work positioning
- Used in double mode, on the harness lateral attachment points, to distribute the weight on the belt (user has weight on his feet): length is adjusted by pressing on the pivoting cam)
- Can be used in single mode, on the harness ventral attachment point, to distribute weight between the waistbelt and the leg loops (user is suspended): length is adjusted by operating the handle while holding the free end of the lanyard (it is necessary to open the device to remove the protective sheath)
- Removable protective sheath protects the rope from abrasive surfaces and allows smooth rope glide
- Available in several lengths:
 - GRILLON (L52H 002): 2 m, 625 g
 - GRILLON (L52H 003): 3 m, 735 g
 - GRILLON (L52H 004): 4 m, 815 g
 - GRILLON (L52H 005): 5 m, 895 g
- Certification(s): CE EN 358

GRILLON MGO


Adjustable work positioning lanyard with MGO large opening connector

- Lanyard with fine adjustment system for precise work positioning
- Used in single mode, on the harness ventral attachment point, to distribute weight between the waistbelt and the leg loops (user is suspended): length is adjusted by operating the handle while holding the free end of the lanyard
- Available in one length:
 - GRILLON (L52M 003): 3 m, 995 g
- Certification(s): CE EN 358



GRILLON lanyard ropes are also available individually:

- rope for GRILLON lanyards (L52R 002, 003, 004, 005)
- rope for GRILLON HOOK lanyards (L52RH 002, 003, 004, 005)
- rope for GRILLON MGO lanyard (L52RM 003)

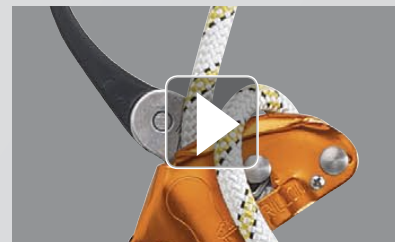

Discover all the possibilities of GRILLON positioning lanyards at www.petzl.com/GRILLON.