

# MASKS WITH THREADED CONNECTOR



These masks are equipped with a standard thread connector EN148-1 and as such they can be used with all devices provided with the same connector (gas and particle filters, negative pressure BA, air line etc.). **ST 85** is a professional and durable half mask. It is ideal for chemical and pharmaceutical companies, agriculture and mining industry. **TR82** and **TR2002** are masks with wide visibility visor and speech device. These masks are available in TPE, EPDM or Silicone.

SPASCIANI filters are available in many versions and capacities with high performances. They are the result of the fruitful Research & Development and of the technology improvement. Consult the table "GUIDE TO FILTER SELECTION" at page 68.



TR82



TR 2002 CL3



ST85



TR2002 CL2



TR82 S



TR2002 CL3 S

## Masks with threaded connector EN 148-1

111200000	ST 85 half mask
113020000	TR 2002 CL2 full face mask
113030000	TR 2002 CL3 full face mask
113080000	TR 2002 CL3 full face mask yellow silicone
112190000	TR 82 full face mask
112240000	TR 82 full face mask hard coat visor
112170000	TR 82 full face mask yellow silicone
112220000	TR 82 full face mask safety glass
112250000	TR 82 full face mask safety glass silicone

## TR 2002 CL3

**TR 2002 CL3** is a mask fitted with a polycarbonate panoramic visor scratch and solvent resistant. It features two distinct areas to permit unaltered vision even downwards to see possible obstacles. The visor is Optical Class 2 (EN166).  
The seal on the face is obtained by a double revert flap made of EPDM

or Silicone. The head Harness with self-adjusting buckles is made of EPDM. The modern and endearing design allows a comfortable wear and an easy dismantling for cleaning and maintenance. The shape of the facepiece permits the use of safety caps and ear muffs. The mask is **Class 3**.



Five arm head harness moulded in rubber and fitted with quick adjusting buckles

Outer facepiece moulded in rubber or silicone

Wide visibility visor moulded in coated polycarbonate scratch and solvent resistant

Inner half mask made of TPE fitted with two check valves for air circulation to prevent the visor to steam-up

Connector Group which unites: exhalation valve, speech diaphragm, inhalation valve holding gasket and threaded connector EN148-1 (40 x 1/7")

DUPLA adapter (optional)

Strap around the neck for carrying the mask during rests



TR2002 CL3 S  
113080000


## Maschere raccordo a vite EN 148-1

113080000	Mask TR 2002 CL3 in silicone
113030000	Mask TR 2002 CL3 scratch resistant visor

## TR 2002 CL2

**TR 2002 CL2** keeps the major characteristics of a modern and endearing design, comfortable wear and easiness of dismantling for maintenance and cleaning of the version in Class 3. The main differences in respect to the better performing model are in the double revert seal facepiece which is made of TPE.

Moreover the ample panoramic visor is made of natural polycarbonate, it keeps the feature of avoiding vision distortion as all TR 2002. This mask is **Class 2**. More precisely it is suitable to all activities where resistance to radiant heat is not required.

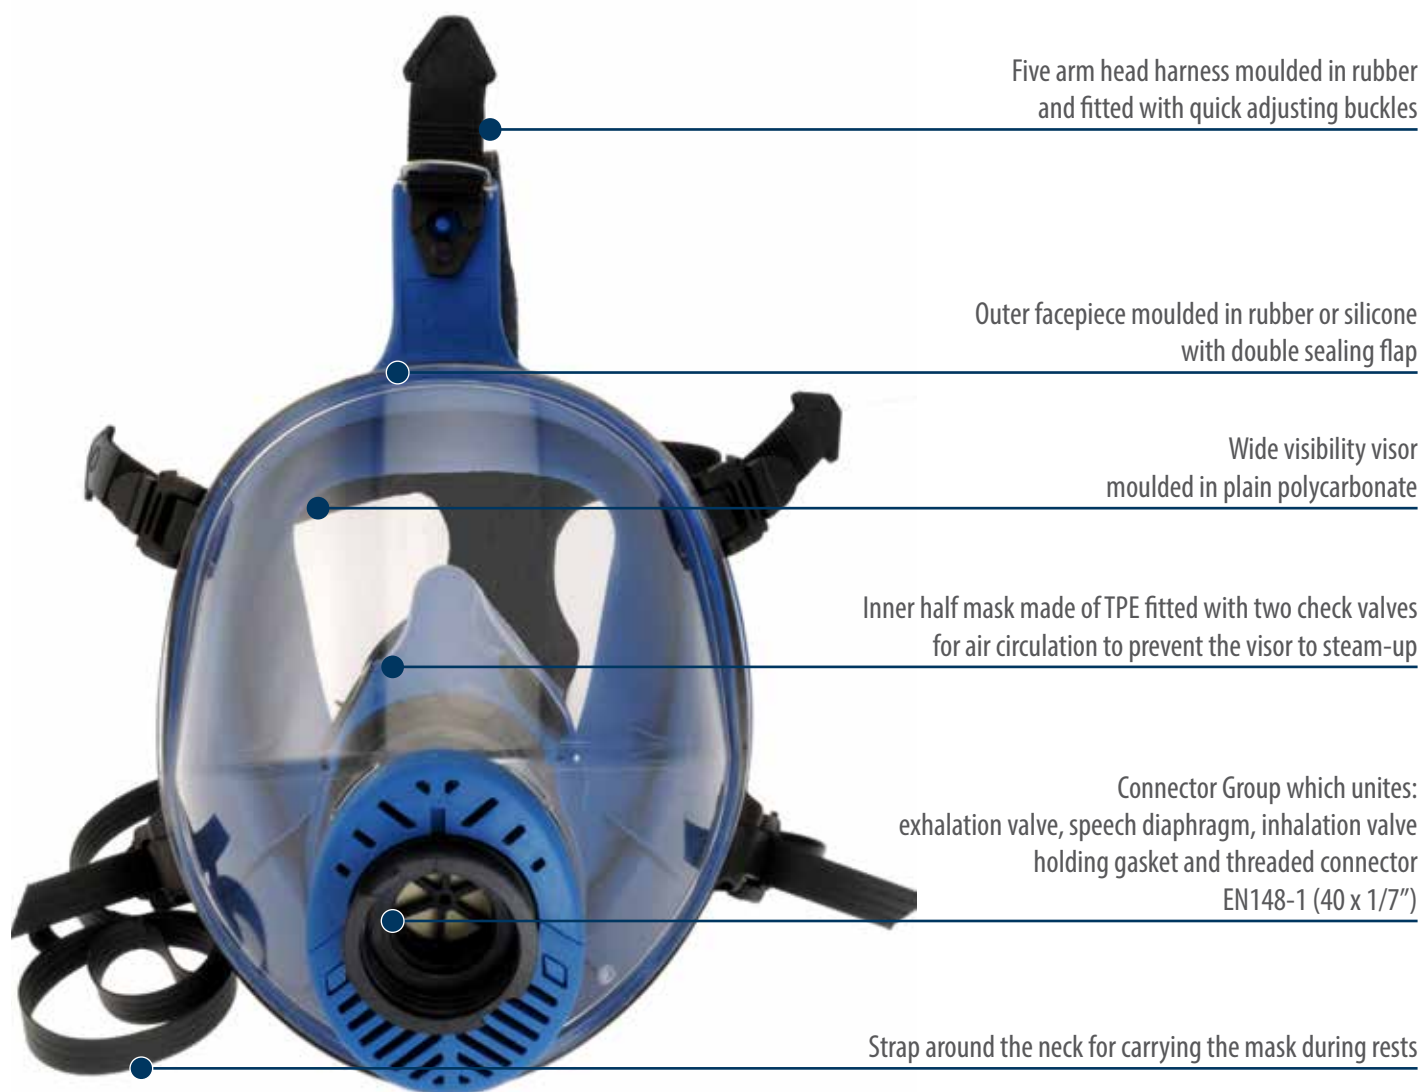

## Mask TR 2002 CL2

1130200000

Mask TR 2002 CL2

# TR 82

**TR 82** is a mask fitted with natural polycarbonate visor giving a wide field of vision. The seal on the face is obtained by a double revert flap made of EPDM or Silicone. The head Harness with self-adjusting buckles is made of EPDM.

The classic design allows a comfortable wear particularly to thin or female faces. The maintenance is very simple and it is possible to easily replace the visor.

This mask is **Class 3**.

Masks with threaded connector	
112190000	Mask TR 82
112240000	Mask TR 82 Solvent and Scratch resistant visor
112170000	Mask TR 82 Yellow Silicone
112220000	Mask TR 82 Safety Glass
112250000	Mask TR 82 Safety Glass Visor Silicone



Five arm head harness moulded in rubber and fitted with quick adjusting buckles

Outer facepiece moulded in rubber or silicone

Wide visibility visor moulded in coated polycarbonate scratch and solvent resistant or Safety Glass

Inner half mask made of TPE fitted with two check valves for air circulation to prevent the visor to steam-up

Connector Group which unites:

- exhalation valve
- speech diaphragm
- inhalation valve
- holding gasket and threaded connector

Strap around the neck for carrying the mask during rests

