




Window cleaning on the Elbphilharmonie building, Hamburg, Germany © Petzl - vuedici.org - 3Ker Ras Group/ABO Glasreinigung - Elbphilharmonie



Customization by request

To more precisely meet the specific needs of certain professionals, Petzl offers a customization service.

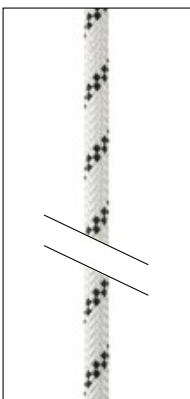

Choice of lengths

It is possible to order a rope of a specified length.



Addition of sewn terminations

The rope can have sewn terminations manufactured on one or both ends. This makes it ready for use without adding any knots.

These terminations have a sheath that protects the stitching from abrasion and facilitates handling by holding the connector in position.

Low stretch kernmantel ropes

For work at height

Low stretch kernmantel rope with standard diameter ensures good grip for easier handling.



AXIS 11 mm



AXIS 11 mm with sewn termination

For rope access

Low stretch kernmantel rope with small diameter to ensure very good performance in terms of flexibility and weight.



PARALLEL 10,5 mm

For rescue

Low stretch kernmantel rope with a large diameter that ensures great strength and excellent handling when working with heavy loads.



VECTOR 12,5 mm

Dynamic rope

For progression using rock climbing techniques.



MAMBO 10,1 mm

Technical cord

Cord for creation of Prusik knots, anchors or haul systems.



SEGMENT 8 mm

Accessory cord

Cord for guiding a victim during rescue, or for hauling equipment.



Cords 4, 5, 6, 7 mm

Rope protectors

Devices that protect the rope at rub points.



PROTEC



SET CATERPILLAR



ROLL MODULE



Low stretch kernmantel ropes

A specific construction for each use and a choice of lengths and colors according to user needs.



- **EverFlex construction: consistent performance over time**

Petzl low stretch kernmantel ropes are made with a nylon core and a specially-braided polyester sheath.

This construction ensures great flexibility over time and under any conditions (water, dust, mud...). The flexibility allows it to maintain consistent handling over the long run and perform optimally with devices.

CE NFPA EAC

- **Multiple certifications**

Petzl low stretch kernmantel ropes are certified to the following standards:

- European: CE EN 1891 type A
- American: NFPA 1983
- Russian: EAC

- **Available in several lengths and colors**



Petzl low stretch kernmantel ropes come in several standard lengths, according to user needs and activities.

They are also available in six colors for easy differentiation of working ropes, safety ropes, and common access ropes.

- **For work at height**



Low stretch kernmantel rope with standard diameter ensures good grip for easier handling.

- **For rope access**



Low stretch kernmantel rope with small diameter to ensure very good performance in terms of flexibility and weight.

- **For rescue**



Low stretch kernmantel rope with a large diameter that ensures great strength and excellent handling when working with heavy loads.



AXIS 11 mm

Low stretch kernmantel rope with good handling for work at height

The AXIS 11 mm low stretch kernmantel rope is designed for work at height. The standard diameter ensures a good grip for easier handling. The EverFlex construction guarantees great flexibility and consistent performance over time. Rope available in six colors and four lengths.



AXIS 11 mm with sewn termination

Low stretch kernmantel rope with sewn termination and good handling, for work at height

The AXIS 11 mm low stretch kernmantel rope with sewn termination is designed for work at height. The standard diameter ensures a good grip for easier handling. The EverFlex construction guarantees great flexibility and consistent performance over time. The sewn termination with protective sheath helps keep the connector in position and facilitates handling. It is suitable for use with an ASAP mobile fall arrester, or in a rescue kit with an I'D S descender. Rope available in six lengths.



PARALLEL 10.5 mm

Low stretch kernmantel rope, flexible and lightweight for rope access

The PARALLEL 10.5 mm low stretch kernmantel rope is designed for rope access. The small diameter ensures very good performance in terms of flexibility and weight. It has low stretch when put under tension, increasing efficiency at the start of a rope ascent. The EverFlex construction guarantees great flexibility and consistent performance over time. Rope available in six colors and four lengths.



VECTOR 12.5 mm

Low stretch kernmantel, high-strength rope with excellent handling, for rescue

The VECTOR 12.5 mm low stretch kernmantel rope is designed for rescue. The large diameter ensures great strength and excellent grip when handling heavy loads. The EverFlex construction guarantees great flexibility and consistent performance over time. Rope available in six colors and four lengths.



Dynamic rope



MAMBO® 10.1 mm

Dynamic rope for progression using climbing techniques

The 10.1 mm diameter MAMBO dynamic rope is designed for work at height professionals that use climbing techniques for progression. The thick sheath improves abrasion resistance.

Technical cord




SEGMENT 8 mm

Technical cord

The SEGMENT 8 mm technical accessory cord is used when creating Prusik knots, anchors or haul systems. The EverFlex construction guarantees great flexibility and consistent performance over time. Cord available in three lengths.

Accessory cord



Cords

Accessory cords

These rugged and durable cords are for guiding a victim during rescue, or for hauling equipment. Available in four diameters, in a 120 meter roll.



Rope protectors



PROTEC

Flexible protection

Flexible PROTEC protection helps protect a fixed rope from abrasion. It is quick and easy to install.



SET CATERPILLAR

Articulated protector

The SET CATERPILLAR articulated protector helps protect a moving rope from abrasion. The number of modules can be adapted to the terrain.




ROLL MODULE

Articulated protector with rollers




ROLL MODULE is an articulated protector with rollers designed to guide a moving rope and protect it from abrasion. It offers the possibility of adapting the number of modules to the terrain and of minimizing abrasion.

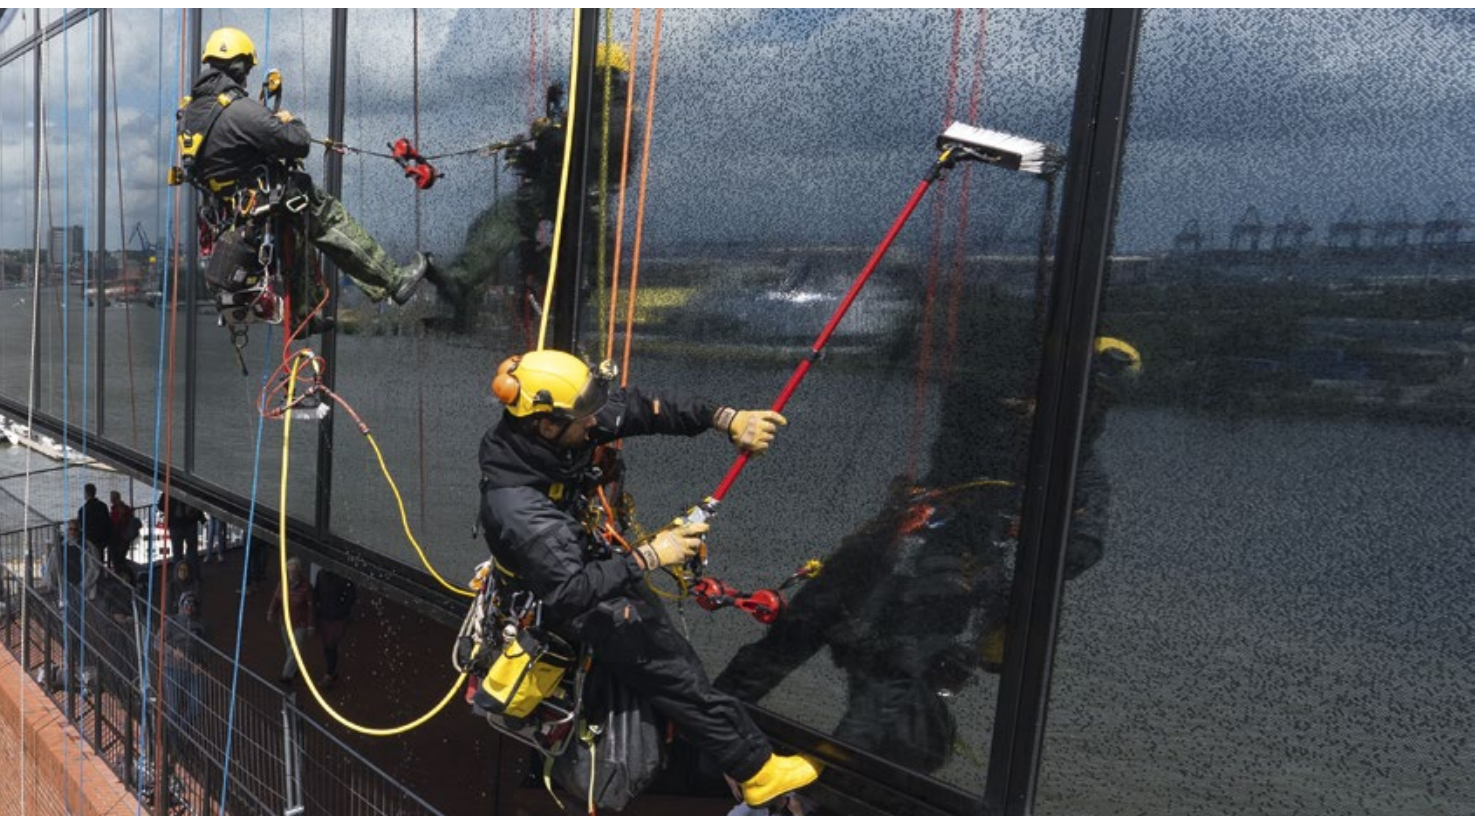


		Weight
PROTEC	C45 N	95 g
SET CATERPILLAR	P68	1055 g
ROLL MODULE	P49	1330 g



Window cleaning on the Elbphilharmonie building, Hamburg, Germany © Petzl - vuedici.org - 3Ker Ras Group/ABO Glasreinigung - Elbphilharmonie



	Colors	Lengths	European certification	US certification	Russian certification	Weight per meter	
Low stretch kernmantel ropes							
AXIS 11 mm 	R074AA03	white	50 m	CE EN 1891 type A	NFPA 1983 Technical Use	EAC	82 g
	R074AA04	yellow					
	R074AA05	black					
	R074AA38	blue					
	R074AA39	red					
	R074AA40	orange	100 m				
	R074AA09	white					
	R074AA10	yellow					
	R074AA11	black					
	R074AA12	blue					
	R074AA13	red	200 m				
	R074AA14	orange					
	R074AA21	white					
	R074AA22	yellow					
	R074AA23	black					
	R074AA24	blue	500 m				
	R074AA25	red					
	R074AA26	orange					
	R074AA28	white					
	R074AA00	white					
	R074AA01	yellow					
	R074AA02	black					
	R074AA35	blue					
	R074AA36	red					
	R074AA37	orange	200 ft				
	R074AA06	white					
	R074AA07	yellow					
R074AA08	black						
R074AA41	blue						
R074AA42	red	600 ft					
R074AA43	orange						
R074AA15	white						
R074AA16	yellow						
R074AA17	black						
R074AA18	blue	1200 ft					
R074AA19	red						
R074AA20	orange						
R074AA27	white						
AXIS 11 mm with sewn termination 	R074BA00		white	10 m	CE EN 1891 type A	NFPA 1983 Technical Use	EAC
	R074BA01	20 m					
	R074BA02	30 m					
	R074BA03	40 m					
	R074BA04	50 m					
R074BA05	60 m						
PARALLEL 10.5 mm 	R077AA03	white	50 m	CE EN 1891 type A	NFPA 1983 Technical Use	EAC	75 g
	R077AA04	yellow					
	R077AA05	black					
	R077AA35	blue					
	R077AA36	red					
	R077AA37	orange	100 m				
	R077AA09	white					
	R077AA10	yellow					
	R077AA11	black					
	R077AA12	blue					
	R077AA13	red	200 m				
	R077AA14	orange					
	R077AA21	white					
	R077AA22	yellow					
R077AA23	black						
R077AA24	blue	500 m					
R077AA25	red						
R077AA26	orange						
R077AA28	white						

		Colors	Lengths	European certification	US certification	Russian certification	Weight per meter
Low stretch kernmantel ropes							
VECTOR 12.5 mm 	R078AA03	white	50 m	CE EN 1891 type A	NFPA 1983 General Use	EAC	111 g
	R078AA04	yellow					
	R078AA05	black					
	R078AA38	blue					
	R078AA39	red					
	R078AA40	orange					
	R078AA09	white	100 m				
	R078AA10	yellow					
	R078AA11	black					
	R078AA12	blue					
	R078AA13	red					
	R078AA14	orange					
	R078AA21	white	200 m				
	R078AA22	yellow					
	R078AA23	black					
	R078AA24	blue					
	R078AA25	red					
	R078AA26	orange					
	R078AA28	white	500 m				
	R078AA00	white	150 ft				
	R078AA01	yellow					
	R078AA02	black					
	R078AA35	blue					
	R078AA36	red					
	R078AA37	orange					
	R078AA06	white	200 ft				
	R078AA07	yellow					
R078AA08	black						
R078AA41	blue						
R078AA42	red						
R078AA43	orange						
R078AA15	white	600 ft					
R078AA16	yellow						
R078AA17	black						
R078AA18	blue						
R078AA19	red						
R078AA20	orange						
R078AA27	white	1200 ft					
Dynamic rope							
MAMBO 10.1 mm 	R32AB 200	blue	200 m	CE EN 892	-	-	65 g
	R32AY 200	yellow					
Technical cord							
SEGMENT 8 mm 	R076AA00	white	50 m	CE EN 564	NFPA 1983 Escape Use	-	43 g
	R076AA03		100 m				
	R076AA06		200 m				
Accessory cord							
Cords	4 mm	R044AA00	orange	CE EN 564	-	-	10 g
	5 mm	R045AA00	red				15 g
	6 mm	R046AA00	green				24 g
	7 mm	R047AA00	blue				31 g

